REVISIONS		
REV.	DESCRIPTION	DATE

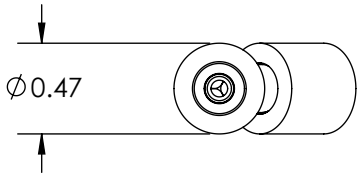

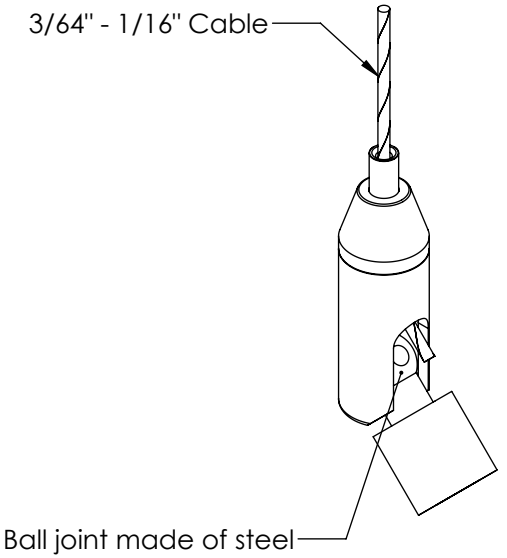

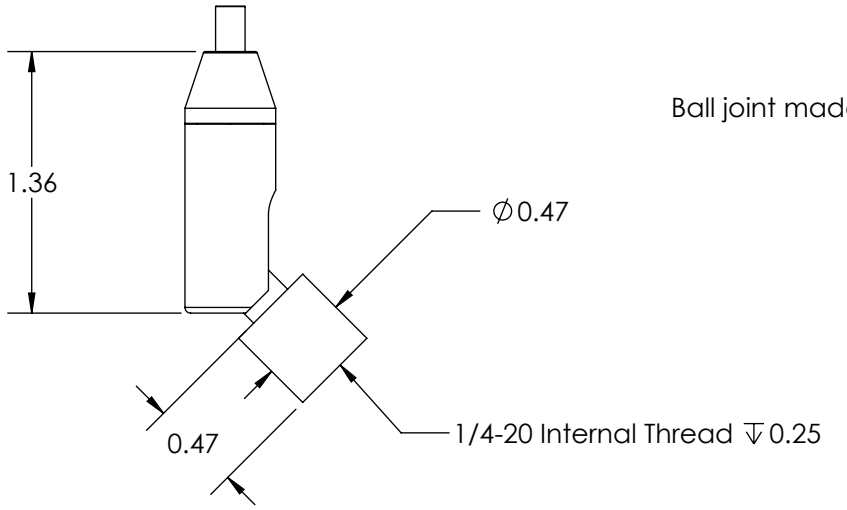

Notes:
1. Available external thread option (ZF-15Z-JU-1420e-315)

Unless otherwise specified
1. Dimensions are in inches
2. Tolerances are:
.XX ±.01 .XXX ±.005 Angles 1°
3. Break all edges .005 min
4. Finish 63 micro inches
5. Dimensions apply after finish
6. Concentricity = .025 TIR

DRAWN BY | REV INT

CHECKED BY

PROPRIETARY AND CONFIDENTIAL
This drawing and these specifications are the exclusive property of GRIPLOCK SYSTEMS LLC. and shall not be divulged, reproduced, copied, or used as the basis for the manufacture or sale of apparatus without the express written authorization of GRIPLOCK SYSTEMS LLC.

REF: | DATE: 7/13/15

MATERIAL: NICKEL PLATED BRASS

SCALE: 1:1 | FILE: ZF-15Z-JU-1420i

GRIP LOCK SYSTEMS

GRIPLOCK SYSTEMS
793 Duncan Reidville Rd. Duncan, SC 29334
Phone (805) 566-0064 Fax (805) 566-0065

PART NUMBER: ZF-15Z-JU-1420i

DESCRIPTION: Universal Jointed Gripper for 3/64" to 1/16" Cable