Typ Suspended Fixture Below Duct

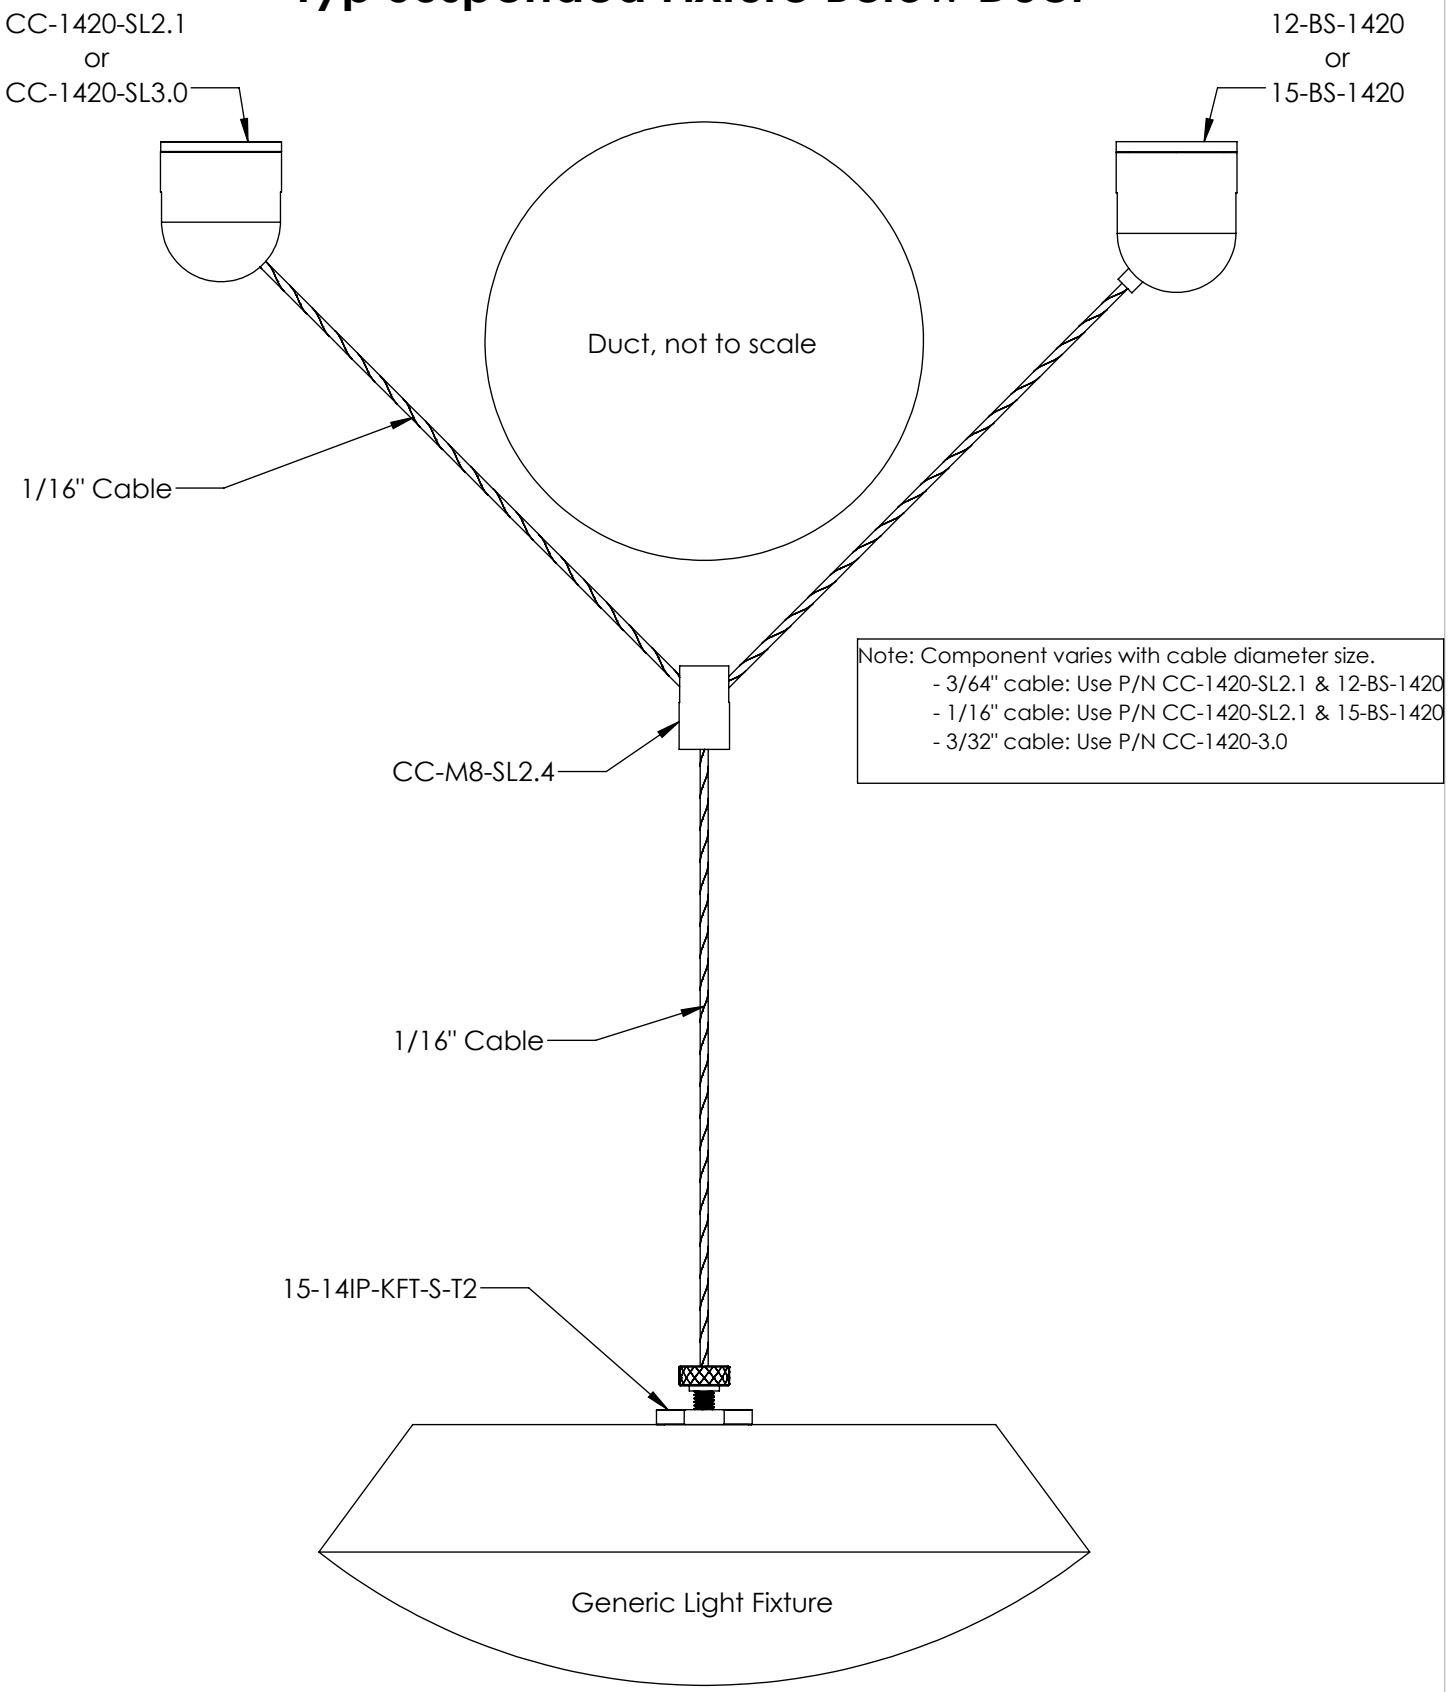

Note: Component varies with cable diameter size.
- 3/64" cable: Use P/N CC-1420-SL2.1 & 12-BS-1420
- 1/16" cable: Use P/N CC-1420-SL2.1 & 15-BS-1420
- 3/32" cable: Use P/N CC-1420-3.0

PROPRIETARY AND CONFIDENTIAL
This drawing and these specifications are the exclusive property of GRIPLOCK SYSTEMS LLC and shallnot be divulged, reproduced, copied, or used as the basis for the manufacture or sale of apparatus without the express written authorization of GRIPLOCK SYSTEMS LLC.

REF: | DATE:

MATERIAL: NA

SCALE: 1:1.5 | FILE: Suspended fixture below duct rA

GRIPLOCK SYSTEMS
793 Duncan Reidville Rd., Duncan, SC 29334
Phone (805) 566-0064 www.griplocksystems.com

GRIPLOCK P/N:

DESCRIPTION:
Suspended fixture below duct